



Not to scale.



MATERIAL SPECIFICATIONS

Polypropylene

PRODUCT DESCRIPTION

TRUFAST®'s Thermal-Grip® Flat Washer aids in the mechanical attachment of commercial building wrap and rigid foam insulation. The flexible 2" diameter washer seals penetration.

PRODUCT FEATURES


- 2" diameter.
- Tested in leading air barrier systems.
- Carbon Black UV stabilizers.
- Flattens on surface of insulation.
- Rapid attachment using Grip-Lok® Autofeed Gun.
- Flexible perimeter compresses on surface and reduces tearing.
- Stiffened center "Bullseye" ring prevents fastener pull-through.
- Made in USA.

APPROPRIATE ACCESSORIES

Use with the Grip-Lok® Autofeed Fastening System with 2" diameter Grip-Lok® Nose Cup Adaptor.



PRODUCT SPECIFICATIONS

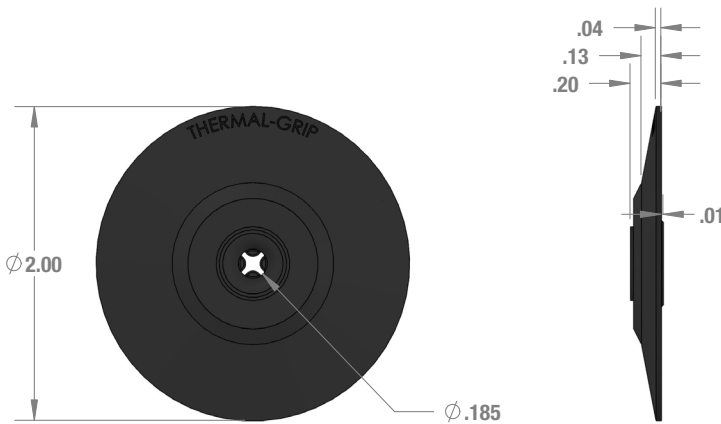

PRODUCT SELECTION

Part No.	TGFlatBugle
Washer Dia.	2"
Pkg. Qty.	1,000
Pkg. Wt.	8.8 lbs.



Bulletin No. TFW-24012

DISCLAIMER: The information provided here is subject to change without notice. The performance specifications published in this TRUFAST® product literature are based on controlled laboratory tests and are intended as a guideline only. They are not guaranteed in any way by the ALTENLOH,

BRINCK & CO. US, INC., since building design, engineering, and construction, including workmanship and materials, are beyond the control of the manufacturer. The manufacturer recommends that pull-out tests be conducted to verify the substrate provides adequate pull-out values.