



THERMAL-GRIP FASTCAP

FASTER. STRONGER. BETTER.

Thermal-Grip FastCap™

Mechanical attachment of DuPont™ Tyvek® CommercialWrap® and CommercialWrap® D. Available in hilo or sds (self-drilling screws) for wood or steel substrates in lengths ranging from 1 5/8" - 6".

APPROVED FOR USE WITH



Air-Barrier Performance

2" diameter solid cap washer helps seal the air barrier penetration. Attaches wrap over gypsum, plywood / osb or rigid foam insulation.

Labor-Saving Tools Available

Optional labor-saving 2" diameter cup adaptor fits commonly available autofeed screw guns. (Available as complete system from TRUFast Walls)

PRE-ASSEMBLED


- OR -

AUTOFEED SYSTEM



SDS (12-18 gauge steel studs) - 1 5/8", 2", 3", 3 1/2", 4", 4 1/2", 5 1/2", or 6"
HiLo (wood or 20-25 gauge steel studs) - 1 5/8", 2", 2 1/2", 3", 3 1/2", 4", 5", or 6"

SDS (12-18 gauge steel studs) - 1 5/8", 2", 2 1/2", or 3"
HiLo (wood or 20-25 gauge steel studs) - 1 5/8", 2, 2 1/2", or 3"

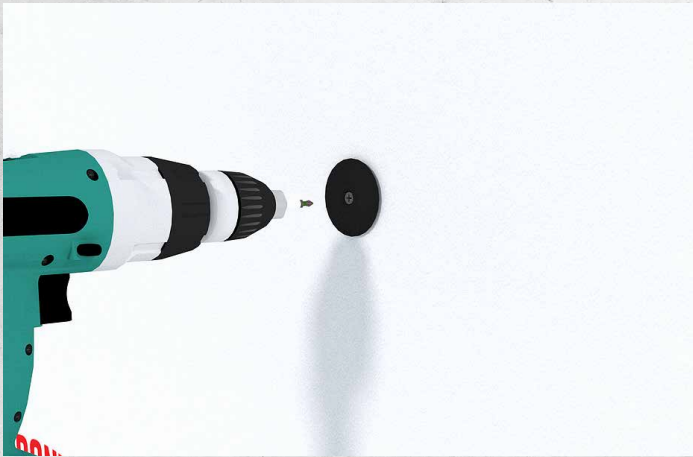

ALTENLOH, BRINCK & CO. U.S., INC.
ALTENLOH, BRINCK & CO. - GROUP

DuPont™ Tyvek® is a registered trademark
Patented and/or patent pending



616-454-3100 • www.ThermalGripFastCap.com

Bulletin No. TFW-2012